

AREN154



15 x (600 x 400)

Item



LCD 10" Touch Screen

One Touch

Automatically and with only a single touch, you can access the ideal and most efficient cooking for each dish, due to the exclusive present and widely tested methods, times and system. A wide range of cooking methods is already tested in the field by a highly qualified group of workers.



MULTILEVEL



JUST IN TIME



AUTOCLIMA



FAST-DRY



SMOKING



FLAVOURING



ECOVAPOR



VIDEO RECIPES



ECOSPEED



GFT
(only for gas models)



LM CLEANING SYSTEM
COMBI CLEAN



CLOUD EVOLUTION



CHEF PORTAL



SYNCHRONISATION



REMOTE SERVICE



COOKING MODES

- ICS (Interactive Cooking System), an automatic cooking system for Italian, French, International, Spanish, Russian, Asian and German recipes including their history, ingredients, procedure, automatic cooking program and plate presentation
- Manual cooking with three cooking modes: Convection from 30°C to 300°C, Steam from 30°C to 130°C, Combination Convection + Steam from 30°C to 300°C
- Programmable modes - Possibility to program and save cooking methods in an automatic sequence (up to 15 cycles) giving each program its own name, picture and information on the recipe

OPERATION

- DISPLAY that can be configured based on the needs of the user, bringing forward the programs used most
- LAINOX Cloud Wi-Fi/Ethernet connection system for saving personal settings, software updates, HACCP data archiving and downloading new recipes
- Automatic "one touch" cooking (ICS)
- Organization of recipes in folders with preview, giving each folder its own name
- Intelligent recognition of recipes in multilevel folders
- 10" colour screen (LCD - TFT) that is high definition and capacitive with "Touch Screen" functions
- SCROLLER PLUS knob with Scroll and Push function for confirming choices
- Instantaneous display in ICS cooking of the HACCP graphic

AREN154

CLEANING AND MAINTENANCE

- Self-diagnosis before starting to use the equipment, with descriptive and audible signalling of any anomalies
- LM automatic cleaning system with separate container of CombiClean liquid detergent
- Manual cleaning system with retractable hand shower

CONTROL EQUIPMENT

- Autoreverse (automatic reverse of fan rotation) for perfect cooking uniformity
- Automatically regulated steam condensation
- Programmable deferred cooking
- Ability to choose up to 6 fan speeds; the first 3 speeds automatically activate the reduction in heating power
- For special cooking methods, you can use an intermittent speed
- Temperature control at the product core using probe with 4 detection points
- 2 core probe, a LAINOX exclusive
- Core probe connection through a connector outside of the cooking chamber, with the ability to quickly connect the needle probe for vacuum cooking and small pieces
- USB connection to download HACCP data, update software and load/unload cooking programs
- Ready for SN energy optimization system (optional)
- SERVICE program for: Inspecting the operation of the electronic board and display of the temperature probes - Appliance operation timer for all primary functions for programmed maintenance
- ECOSPEED - Based on the quantity and type of product, Naboo optimizes and controls the delivery of energy, maintains the correct cooking temperature, preventing any fluctuations (-10% energy / -30% water / -5% weight loss *)
- ECOVAPOR - With ECOVAPOR system there is a definite reduction in water and energy consumption due to the automatic controls of the steam saturation in the cooking chamber (-10% energy / -30% water / -10% steam *)

CONSTRUCTION

- IPX5 protection against sprays of water
- Perfectly smooth, watertight chamber
- Door with double tempered glass with air chamber and interior heat-reflecting glass for less heat radiation towards the operator and greater efficiency
- Internal glass that folds to open for easy cleaning
- Door with 3 locking points
- Adjustable hinge for optimal seal
- Deflector that can be opened for easy fan compartment cleaning

ELECTRIC HEATING SYSTEM

- Cooking compartment heating elements of armoured INCOLOY 800 type

SAFETY FEATURES

- Cooking compartment safety thermostat
- Cooking compartment safety device for pressure built-up and depression
- Fan motor thermic protection
- Magnetic door switch
- Lack of water displayed alarm
- Self-diagnosis and fault display
- Component cooling system with overheat display control

STANDARD EQUIPMENT

- Automatic washing system LM (equipped with 1 cleanser tank CombiClean - 10 l.)
- Wi-Fi connection
- Multipoint core probe (Ø 3 mm)
- Built-in and retractable hand shower with tap
- Trolley
- 2 aluminium containers 600 x 400 mm

OPTIONAL - TO BE REQUESTED WHEN ORDERING OVEN

- Configuration for connection to extraction hood
- Extra charge for energy saving system connection
- SMOKEGRILL - Flavouring
- Extra charge for Ethernet connection
- Multipoint core probe for large items. Pin length 180 mm. Ø 3 mm

ACCESSORIES

- Needle core probe - ø 1 mm.
- USB pen to download HACCP data, update software and load/unload cooking programs
- Flanged feet kit for marine installations
- Trolley with drip tray
- Extraction hood with air-cooled condenser (available only for prearranged ovens)

** Compared to our previous model*

AREN154



TECHNICAL DATA

Chamber capacity	600 x 400	15	Total electric power	kW	31,8
Distance between layers	mm	89	Gas versions nominal heating output	kW / kcal	- / -
Number of croissants		240	Chamber heating output	kW / kcal	30 / -
External dimensions	mm	960 x 825 x 1810 h	Steam heating output	kW / kcal	- / -
Dimensions with packing	mm	1130 x 1050 x 2060 h	Fan power	kW	1,8
Weight - Net / Gross	kg	260 / 370	Power supply voltage	V - 50 Hz	3N AC 400

Special voltages and frequencies upon request

AREN154

The data reported in this document is to be considered non-binding. The company reserves the right to make changes at any time, without prior notice.

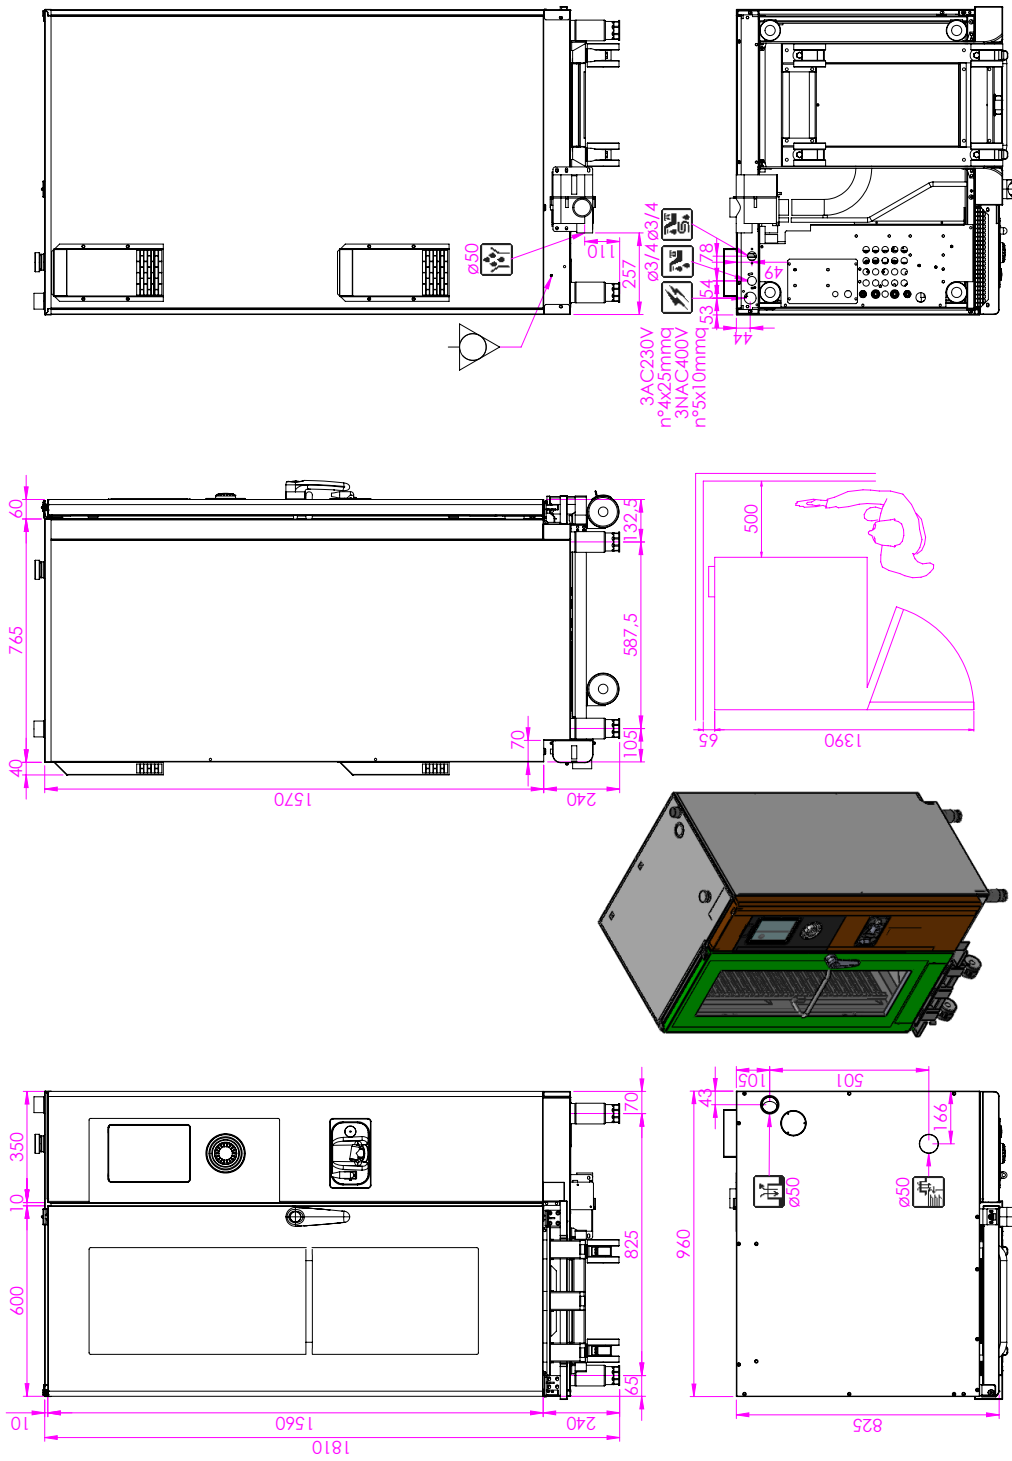

According to CE rules, gas ovens must be installed where proper evacuation of burnt gas can be provided (type B13, B23, A3)

